



5G Multi-Connect Modem IDG470-0G001

KEY FEATURES

- ✓ 1* 4G/5G (2*SIM)
- ✓ 4* RJ-45 GE
- ✓ TB 9-36V in

INTRODUCTION

The IDG470- a 5G Multi-Connect Modem with 5G-NR and 4G LTE dual-mode cellular connection capability makes wireless uplink/ downlink at hand. Designed with 4 Gigabit Ethernet ports, it allows connection to multiple local devices.


BENEFITS

- 1.Plug & Play Ethernet modem; driverless USB modem
- 2.CPU and cellular module are integrated in a compact size for cost-effectiveness
- 3.Low power consumption, highly efficient & reliable
- 4.Wide-range power input to meet site environment
- 5.DIN-Rail and Wall-Mount design for wide deployment
- 6.Support AMIT device management platform- A-NMS, monitoring device, connection status and more

APPLICATION

- 4K/8K video transmission
- Remote operation
- Industrial PC
- RJ45 port for device connection

DIAGRAM

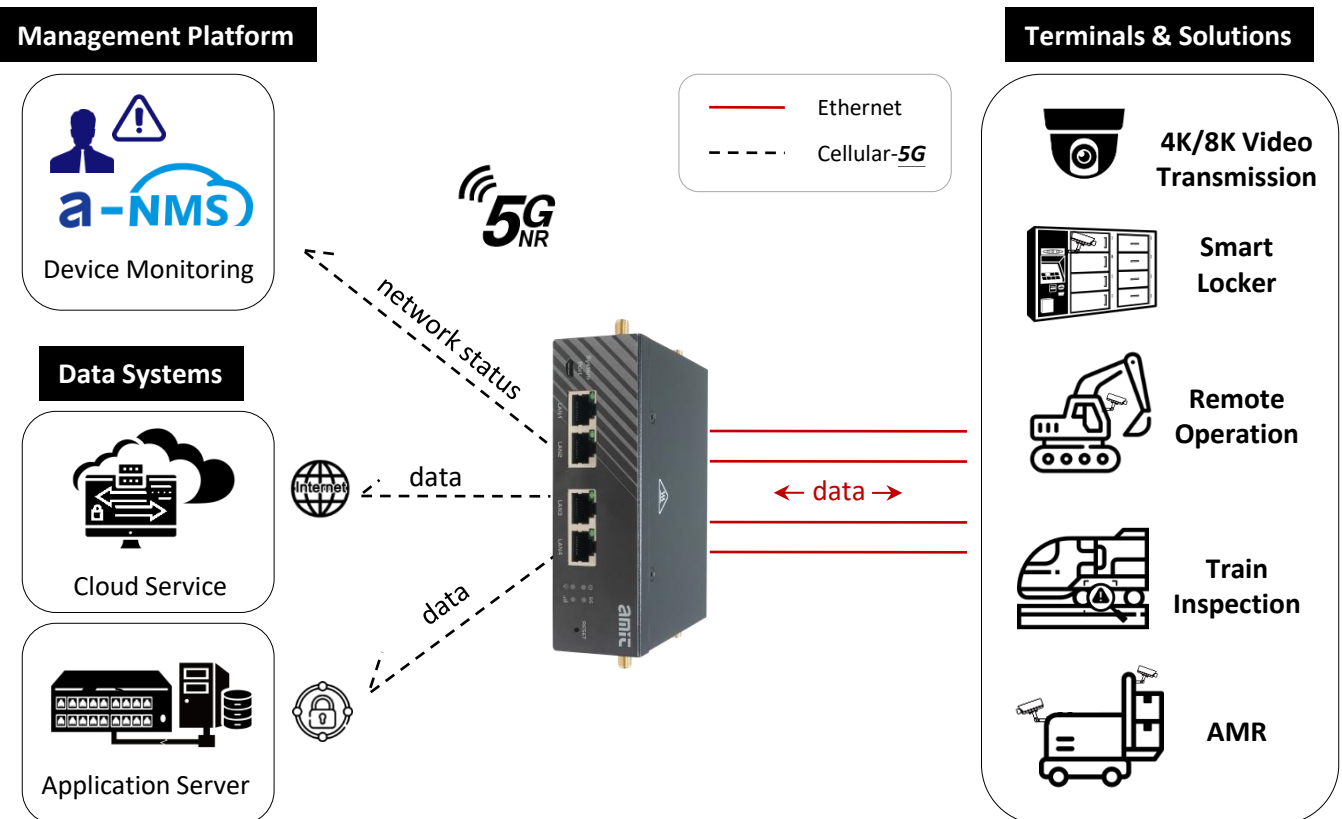

SPECIFICATION

Device Interface

- **LTE Module:** 1*4G/5G, 3GPP Rel. 16
- **SIM:** 2*Micro-SIM (3FF)
- **Ethernet:** 4*RJ45 GE
- **Power Input:** TB 9-36V DC
Power consumption: max. 6W
- **Antenna Con.:** 4*SMA (F)-4G/5G

WAN & Uplink

- **WAN:** Cellular & Config, NAT/ Bridge Mode
- **Cellular:** 4G/5G
- **Network Monitor:** ICMP Checking

Protocol

- **LAN & VLAN:** DHCP Server
- **Port Forwarding:** Virtual Server
- **Routing:** Static Routing, Routing information

Administration

- **Configuration:** Web UI, SSH, CLI, Command Script
- **System:** Upgrade, Reboot & Reset
- **Scheduling:** System Reboot

Status

- **Cellular Mobile:** Signal Quality, IMEI/MEID, Usage Band

Security

- **VPN Tunnel:** OpenVPN, WireGuard
- **VPN Usage:** Site/Host, Client
- **Access Control:** Packet Filter, URL Blocking, MAC Filter, IPS

Environment

- **OP/Storage Temp.:** -30°C ~ 60°C; -40°C ~ 85°C
- **Humidity:** 10%~95% (non-condensing)
- **Enclosure:** Metal, Bracket
- **Dimension:** 131x99x40mm

Package Accessory

- 1*Device
- 1*Terminal block (2 pins for DC power supply)
- 4*Cellular Antenna
- 1*RJ-45 Cable

Optional Accessory

- Power adaptor
- Wall-Mount kits
- DIN-Rail kits

MECHANIC DRAWING

•Front View



•Side View



ORDERING INFORMATION

Country	Band
Global	5G Sub-6G(SA or NSA): n1/n2/n3/n5/n7/n8/n12/n13/n14/n18/n20/n25/n26/n28/n29/n30/n38/n40/n41/n48/n66/n70/n71/n75/n76/n77/n78/n79 DL 4 x 4 MIMO: n1/n2/n3/n7/n25/n30/n38/n40/n41/n48/n66/n70/n77/n78/n79 UL 2 x 2 MIMO: n38/n41/n48/n77/n78/n79 FDD-LTE Bands: B1/B2/B3/B4/B5/B7/B8/B12/B13/B14/B17/B18/B19/B20/B25/B26/B28/B29/B30/B32/B66/B71 TDD-LTE Bands: B34/B38/B39/B40/B41/B42/B43/B48 LAA: B46 DL 4 x 4 MIMO: B1/B2/B3/B4/B7/B25/B30/B38/B40/B41/B42/B43/B48/B66
EU	5G Sub-6G(SA or NSA): n1/n3/n5/n7/n8/n20/n28/n38/n40/n41/n71/n75/n76/n77/n78 DL 4 x 4 MIMO: n1/n3/n7/n38/n40/n41/n77/n78 UL 2 x 2 MIMO (SA only): n38/n40/n41/n77/n78 FDD-LTE Bands: B1/B3/B5/B7/B8/B20/B28/B32/B71 TDD-LTE Bands: B38/B40/B41/B42/B43 DL 4 x 4 MIMO: B1/B3/B7/B38/B41/B42/B43
Regulatory	CE/ FCC/ JATE/ TELEC/ NCC

Comment

- Specifications are subject to change without prior notice.
- *: Under development/in progress.

AMIT Wireless Inc.

TEL: +886 (0)6 505 8026 FAX: +886 (0)6 505 8068

Web: <https://www.amitwireless.com> Email: sales@amit.com.tw

No. 28, Lane 31, Huandong Rd., Sec. 1, Xinshi Dist., Tainan City 74146, Taiwan (R.O.C.)